


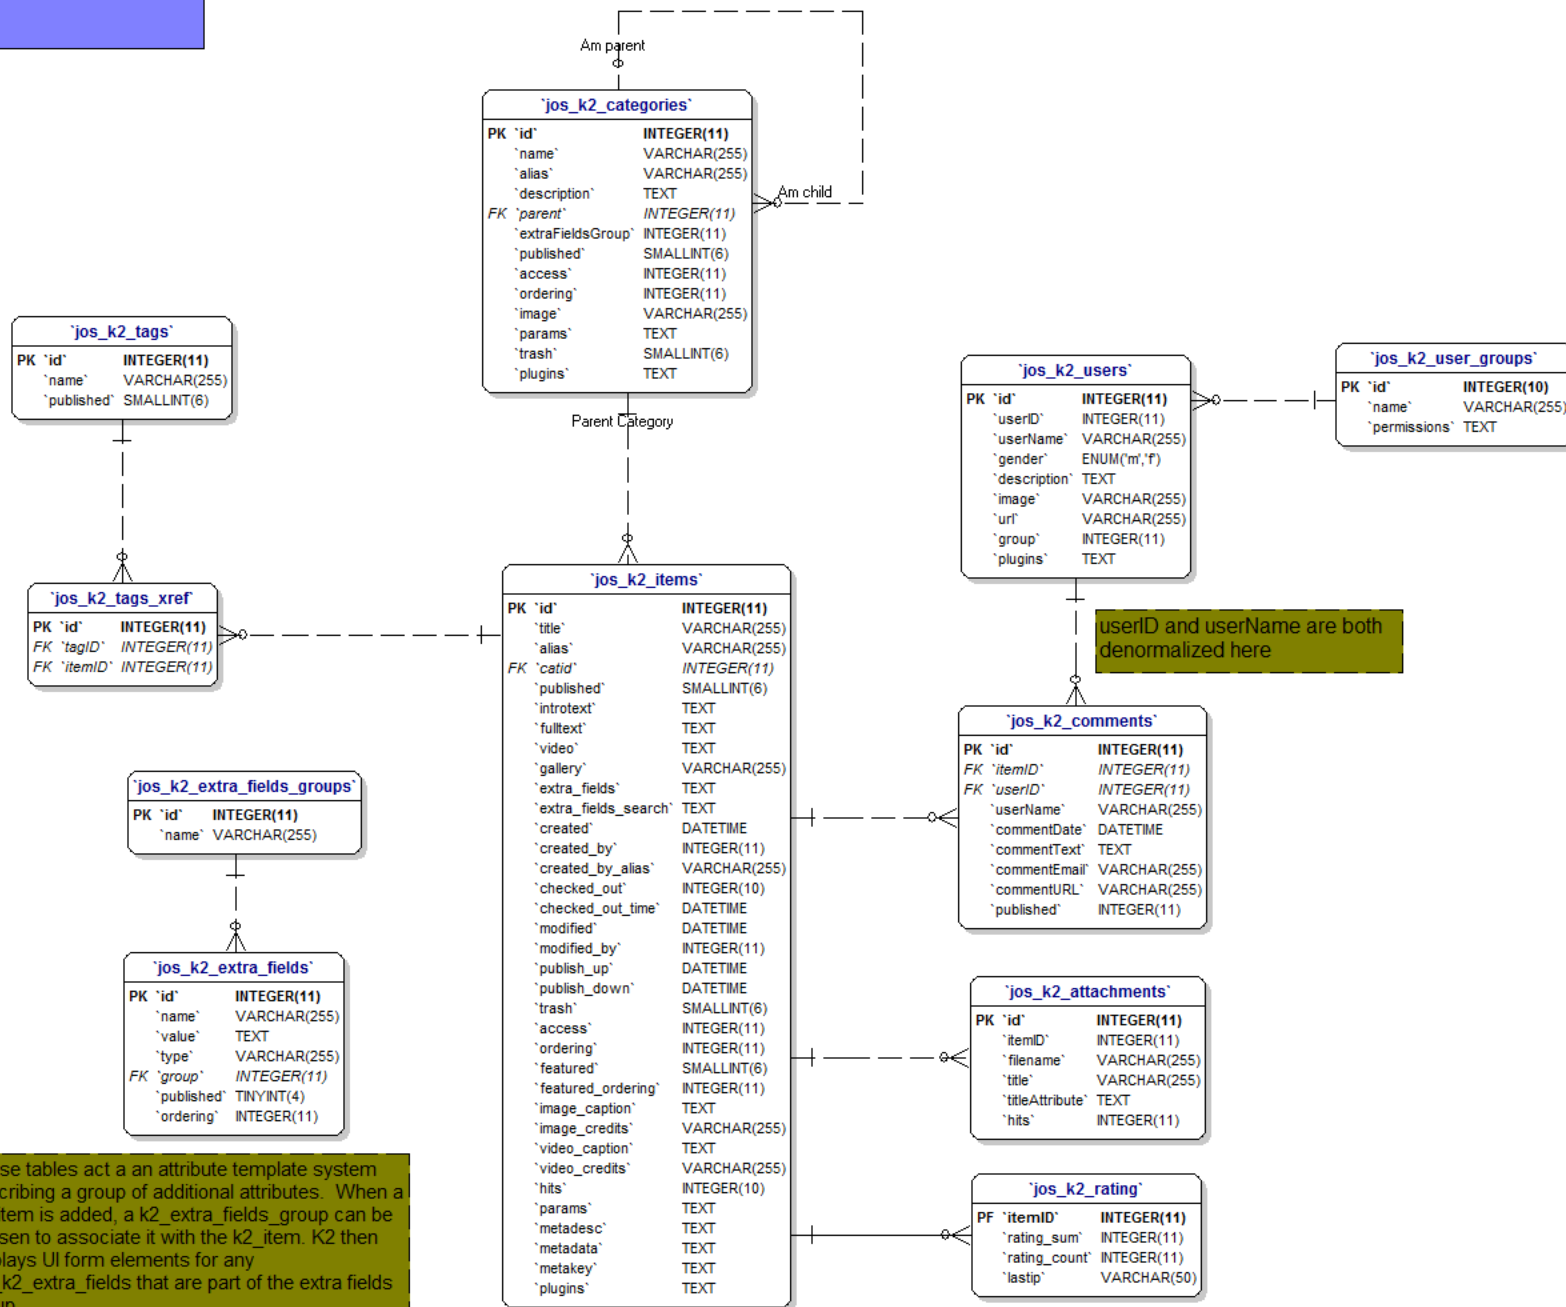

userID and userName are both denormalized here

These tables act as an attribute template system describing a group of additional attributes. When a k2_item is added, a k2_extra_fields_group can be chosen to associate it with the k2_item. K2 then displays UI form elements for any jos_k2_extra_fields that are part of the extra fields group.

When the item is stored, the extra fields data is serialized in JSON format and stored in the jos_k2_items.extra_fields column. A localized string version of the data is also stored in the extra_fields_search column.